



# EVE ICR18650/26V

## Features & Benefits

- High specific capacity and specific energy
- Excellent temperature performance and safety
- Automatic production and good consistency

## Safety Regulation

- GBT31241, UL1642, UN38.3
- IEC62133

## Specifications

Nominal capacity <sup>(1)</sup>	2.55Ah
Nominal voltage	3.60V
Resistance	≤30mΩ
Charging	CC-CV, Std.0.5A, 4.20V
Weight (avg.)	45±2g
Temperature	Charge: 0 to + 55°C (cell surface) Discharge: -20 to + 70°C (cell surface) Storage: 0 to + 60°C
Energy density	Volumetric: 540 Wh/L Gravimetric: 203 Wh/kg

## Dimensions

Unit: mm




For Reference Only

(1) At 25°C, 4.2V to 2.5V using 0.2C discharge current

## Charge Characteristics


Charge : CC-CV 0.5C to 4.20V, 0.02C cut-off at 25±2°C

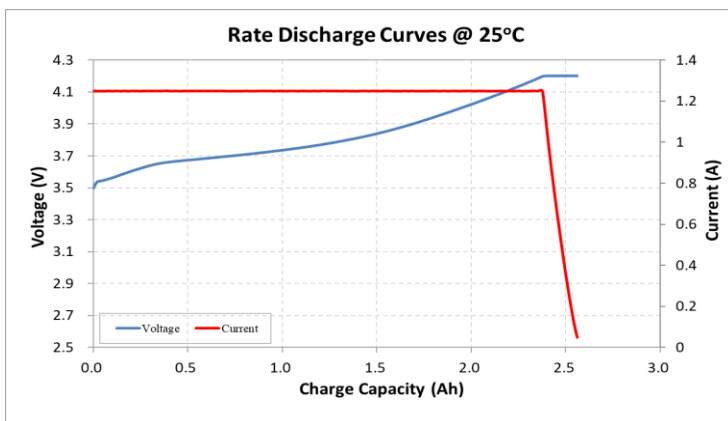

## Cycle Life Characteristics

Charge : CC-CV 0.5C to 4.20V, 0.02C cut-off at 25±2°C


Discharge : CC 1.0C , 3.0V cut-off at 25±2°C

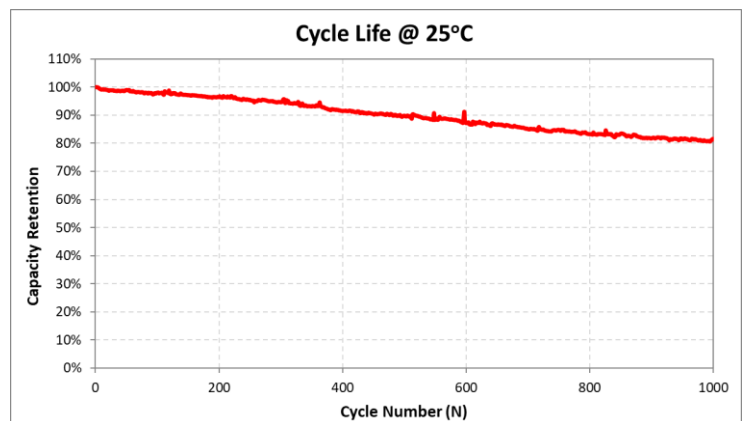

## Discharge Temperature Characteristics

Charge: CC-CV 0.5C to 4.20V, 0.02C cut-off at 25±2°C

Discharge: CC 0.2C , 2.5V cut-off at -20°C / 25°C / 55°C

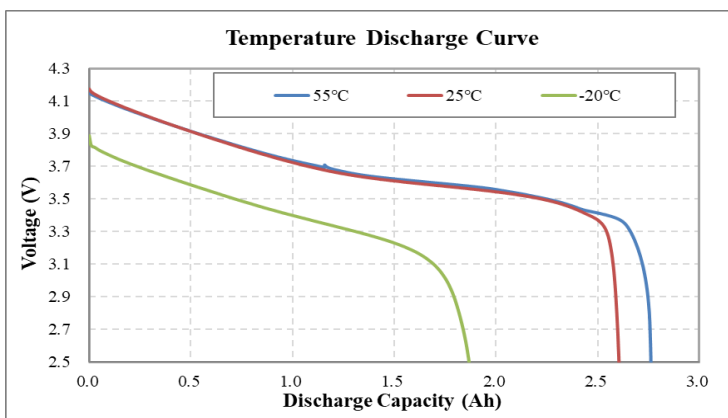

## Discharge Rate Characteristics

Charge: CC-CV 0.5C to 4.20V, 0.02C cut-off at 25±2°C

Discharge: CC 0.2C/0.33C/0.5C/1C/2C/3C to 3.0C , 2.5V cut-off at 25±2°C

