



EVE INR18650/25P

Features & Benefits

- High rated charge & discharge
- Excellent wide temperature characteristics
- Automatic production and good consistency

Safety Regulation


- UL1642, UN38.3, IEC62133

Specifications

Nominal discharge capacity ⁽¹⁾	2500mAh
Nominal voltage	3.6V
AC Impedance 1 kHz	<14.5mΩ
Voltage range	4.2~2.5V
Weight	≤45g
Cell Surface Cut-off Temperature	Charge: 0 to +60°C Discharge: -20 to +80°C
Standard charge current	1.25A
Max. continuous charge current	6.0A
Standard discharge current	0.5A
Max. continuous discharge current	30A(With 75°C temperature cut-off)

(1) CC-CV, 1.25A to 4.2V, 100mA cut-off at 25°C; CC, 0.5A to 2.5V cut-off at 25°C.


Dimensions Unit: mm

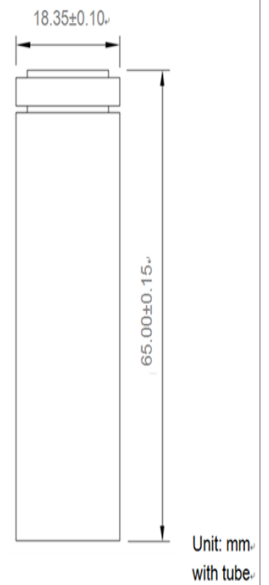

Unit: mm, with tube.
For Reference Only


Charge Characteristics

Charge : CC-CV 1.25A to 4.2V, 100mA cut-off at 25±2°C

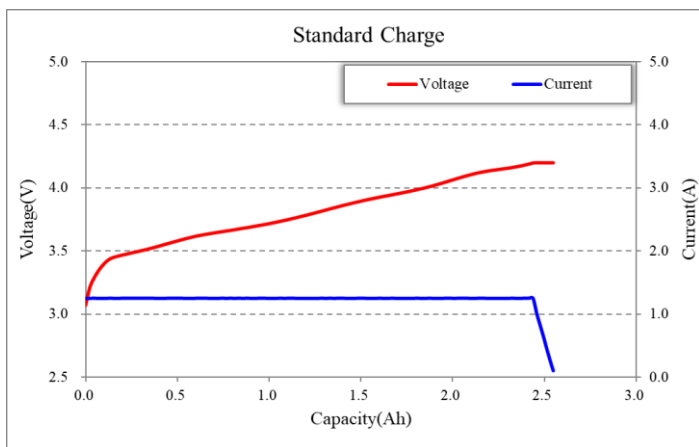


Cycle Life Characteristics (6A/10A)

Charge : CC-CV 6A to 4.2V, 100mA cut-off at 25±2°C
Discharge : CC 10A to 2.5V & 75°C cut-off at 25±2°C

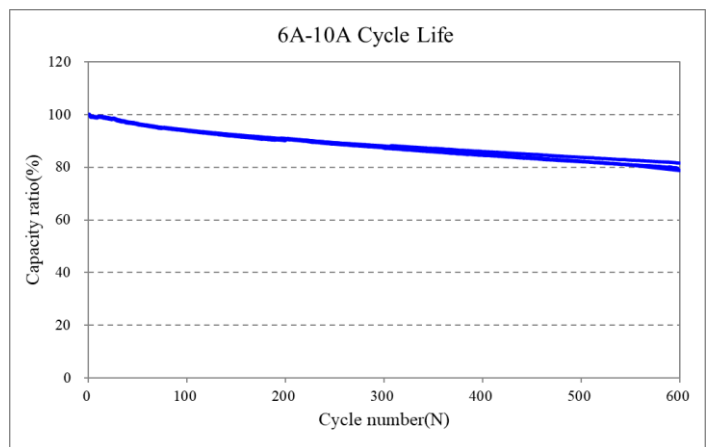


Cycle Life Characteristics (6A/20A-75°C cut-off)

Charge : CC-CV 6A to 4.2V, 100mA cut-off at 25±2°C
Discharge : CC 20A to 2.5V & 75°C cut-off at 25±2°C

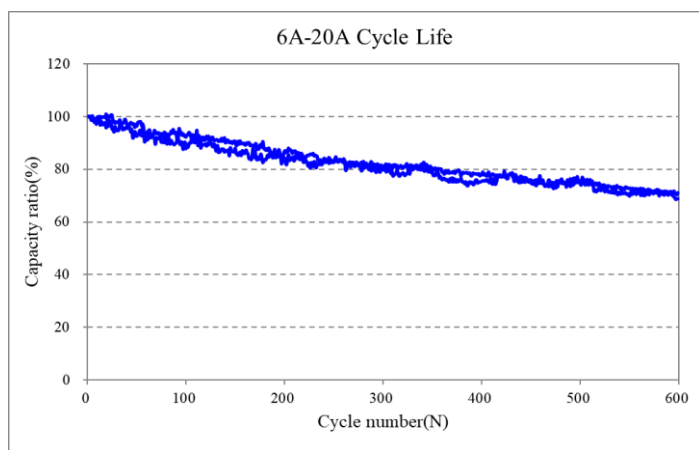


Cycle Life Characteristics (6A/30A-75°C cut-off)

Charge : CC-CV 6A to 4.2V, 100mA cut-off at 25±2°C
Discharge : CC 30A to 2.5V & 75°C cut-off at 25±2°C

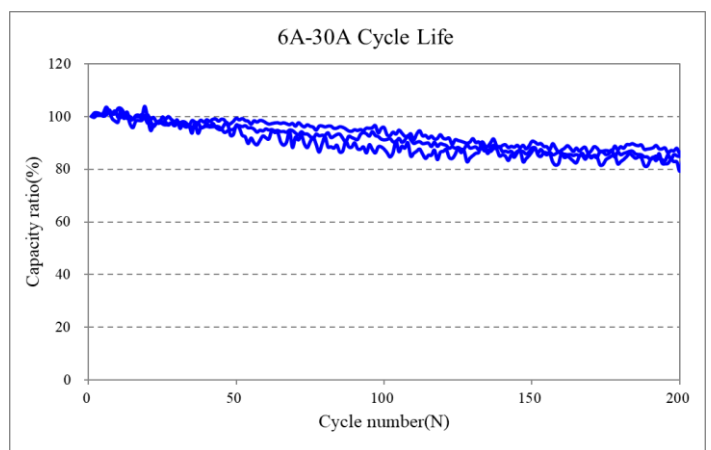

Discharge Temperature Characteristics

Charge: CC-CV 6A to 4.2V, 100mA cut-off at 25±2°C
Discharge: CC 20A to 1.0V cut-off at -20±2°C

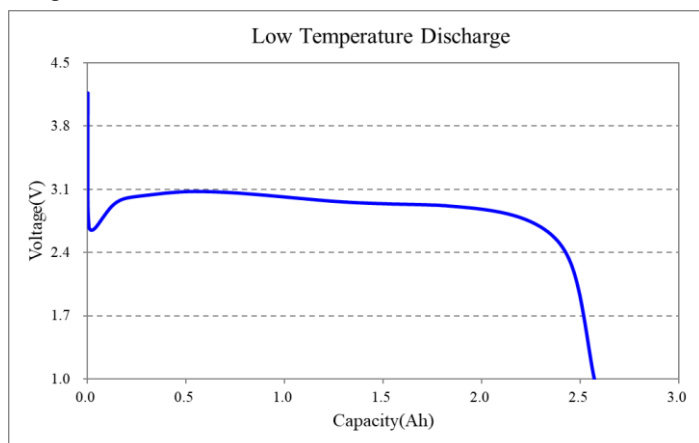

Discharge Rate Characteristics

Charge: CC-CV 6A to 4.2V, 100mA cut-off at 25±2°C
Discharge: CC 0.5A/10A/20A/30A to 2.5V cut-off at 25±2°C

